

# **Vuescape**

## **2.4 GHz Wireless Keyboard**

**Item Number: 61000100**



## **Installation & User's Guide**

**All brand names and trademarks are the property of their respective owners.**

## **Contents**

<b>1. Introduction .....</b>	<b>3</b>
<b>2. Package Contents.....</b>	<b>3</b>
<b>3. System Requirements.....</b>	<b>3</b>
<b>4. Quick Installation Guide.....</b>	<b>4-5</b>
<b>4-1. Programming the Hot Keys.....</b>	<b>5-6</b>
<b>5. Features and Functions Descriptions.....</b>	<b>6</b>
<b>5-1. Description of Internet Keys.....</b>	<b>6</b>
<b>5-2. Description of Multimedia Keys.....</b>	<b>6</b>
<b>5-3. Description of Application Keys.....</b>	<b>6</b>
<b>6. Troubleshooting.....</b>	<b>7</b>
<b>7. FCC &amp; CE Certification .....</b>	<b>8</b>
<b>8. Service Procedure.....</b>	<b>9</b>
<b>9. Warranty.....</b>	<b>10</b>

# 1. Introduction:

## **The 2.4 GHz Wireless Keyboard:**

This keyboard was developed to provide greater efficiency and productivity when working with a PC. The keyboard has 8 hot keys including: Internet, Multimedia and System keys that will increase your productivity by providing direct access to your important applications by a simple press of the key.

2.4GHz wireless technology allows you to work up to 33ft away from your computer without having any interference to the signal.

Instant link technology connects your wireless keyboard to the USB receiver automatically. There is no need for you to re-synchronize the devices.

**The 2.4 GHz Wireless Keyboard** is compatible with Microsoft Office® 2000 / XP / 2003 or later. It is compatible with Windows® 2000, XP and Vista® Operating Systems.


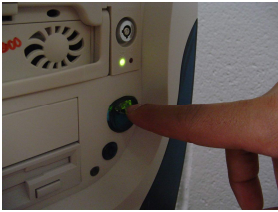


## 2. Package Contents:

- Wireless Keyboard
- USB Wireless Receiver
- User's Manual
- Installation CD
- 2-AAA batteries to power the keyboard

## 3. System Requirements:

- IBM PC or Compatible Computer
- Microsoft Windows® 2000, XP, Vista®.
- CD-ROM or DVD-ROM Drive to install the CD driver.
- An available USB port for the USB Wireless Receiver Connector.

## 4. Quick Installation and Set Up:

	Open the battery compartment located underneath the keyboard and install the 2 AAA batteries. Note the polarity signs in the battery compartment.
	Turn on the power to your computer and make sure your Windows operating system is active.
	Install the Software CD Driver that has been included and you may now go on to section 4-2, Programming the Hot Keys on the Keyboard. <b>Note:</b> Install the Software before plugging in the receiver.
	Insert the USB Receiver into an available USB port. Your computer will recognize the USB device and make the proper settings to enable you to operate your keyboard. Click on any key on your keyboard to connect with the receiver.

- 1) If the keyboard does not work, please see the Troubleshooting information on page 9 of this manual.
- 2) Caution: Before your keyboard can be connected, you need to position the devices within 6 feet of the receiver to establish the initial connection.

**Note:** The Windows operating systems will search for the new **USB HID** products and load the built-in standard **USB HID** device driver automatically. The system may ask for the Windows 2000 full Operating System CD if it needs the driver to update the operating system. (Windows XP and Vista Operating System CD is not required).


Follow the instructions and complete the standard **USB HID** reorganization process. The keyboards' basic functions will work properly, the exception may be the Hot Key Functions which will require you to run the Software CD Driver included with this kit.

## 4-1 Programming the Hot Keys


You can customize your Keyboard Hot Keys by activating the Keyboard Properties. To do this click Start, then Programs, and choose the Wireless Keyboard Properties. Click on the Keyboard Icon located in the lower right hand corner of your screen. When the following screen appears, select which Hot Key you would like to change: Music, Home, E-mail, and Favorites.







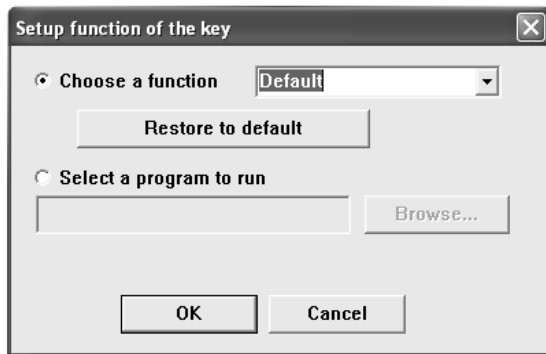Once you click the hot key to change, the following setup screen will appear. Choose a function from the drop down menu list or select a program by browsing your PC. You can restore all the settings to their original configurations by pressing the Restore to Default button.

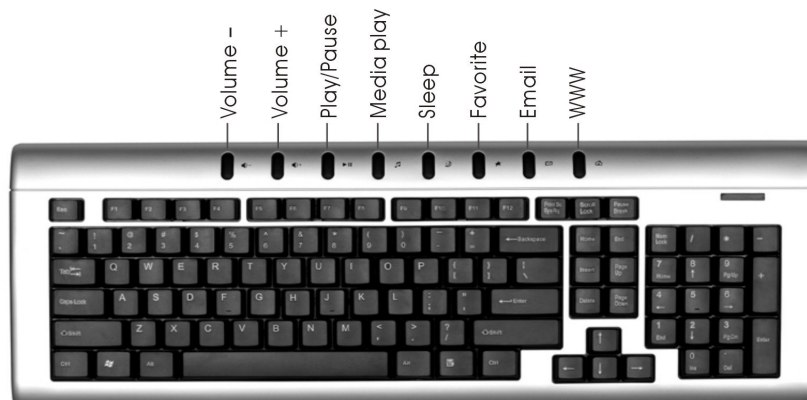


## 5. Features and Function Descriptions:






## 5-1. Multimedia Keyboard Button Descriptions

	Decrease Volume	Press this key to decrease the volume.
	Increase Volume	Press this key to increase the volume.
	Play/Pause	Press this key to Play or Pause Music or Video. Once in Pause mode, press this key again to resume Play.
	Media Play	Press this key to activate your Media software in order to Play Music or Videos

## 5-2. Keyboard Energy Saving Sleep Mode

	Sleep	This button will put the computer system into sleep mode if the PC supports power management and has it enabled. It will protect data and save energy. The user can put the computer into Sleep mode by holding this button down for 3 seconds. Press the key once quickly to awaken the computer from sleep mode.
---	-------	--

## 5-3. Multimedia Keyboard Internet Key Descriptions

	Favorites	Press this key to open the Internet Explorer Favorites listing. This is where you can store shortcuts to frequently used files, websites or other items for easy access.
	Email	Press this key to Start the default e-mail program. If you are not sure what the default e-mail program is, press this key to find out. You can reassign the Email key to start another e-mail program or another application.
	WWW	Press this key to Start the Worldwide Web browser or go to your Home Web page. If the Web browser is already activated it opens the Home Web page. You can reassign the WWW key to start another Web browser, another Home Web page or another application.

## 6. Troubleshooting:

**If you are experiencing problems with your keyboard or mouse please check the following:**

### **Symptom—No response between the receiver and keyboard;**

1. Remove the USB Receiver from the computer and check to see if the Receiver's USB plug is damaged. If the plug appears normal then reinsert the device into a different USB port on your PC, there may be a conflict with the previous USB port.
2. Check to see if the batteries in the keyboard are installed correctly. Make sure the polarity of the batteries corresponds with the polarity signs in the battery compartment.
3. Replace the batteries to make sure the batteries are not low on power.
4. It is strongly recommended that you do not place the USB Receiver near the computer monitor, as the magnetic field produced by the monitor may interfere with the reception of the signal from the keyboard and cause data errors. For best results place the USB Receiver in front of the monitor in order to prevent signal disturbance from the monitor.

### **Symptom—Keyboard is typing the wrong characters;**

5. Replace the batteries to make sure the batteries are not low on power.

### **Symptom---Some Hot Keys do not work properly.**

There are some HP, Compaq or special PC system configurations where the Multi-Media Hot Key Keyboard Driver has been installed previously. This will effect the performance of the Hot Keys keyboard software function. Please make sure the original Multi-Media keyboard software drivers have been removed from your PC. Then restart your computer and reinstall the Software CD Driver that is included with this package.

How to remove the Multi-Media keyboard software driver?

1. Please click the Start button/Control panel, select Add/Remove software and find the original keyboard software for removal.
2. If you cannot find the original keyboard software driver, you should click the Start button/Control panel/System/Hardware/Device manager/keyboard and find the original keyboard device name, then left click the keyboard device name to update the driver. You can select and use "Standard 101/102 key or Microsoft Natural keyboard".
3. Restart your PC system and the keyboard should work properly.

## **FCC AND CE RADIATION NORM**

### **FCC**

This equipment has been tested and found to comply with limits for Class B digital device pursuant to Part 15 of Federal Communications Commission (FCC) rules.

### **CE**

This equipment has been tested and found to comply with the limits of the European Council Directive on the approximation of the law of the member states relating to electromagnetic compatibility (89/336/EEC) according to EN 55022 Class B.

### **FCC and CE Compliance Statement**

These limits are designed to provide reasonable protection against frequency interference in residential installation. This equipment generates, uses and can radiate radio frequency energy, and if not installed or used in accordance with the instructions, may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in television reception, which can be determined by turning the equipment off and on. The user is encouraged to try and correct the interference by one or more of the following measures:

- **Reorient or relocate the receiving antenna**
- **Increase the separation between the equipment and the receiver**
- **Connect the equipment into an outlet on a circuit different from that to which the receiver is connected to.**



### **CAUTION!**

The Federal Communications Commission warns the user that changes or modifications to the unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



## **Customer Service**

**For information regarding the return or exchange of this item within 14 days of purchase , please visit your Inkstop store location or go to [www.inkstop.net](http://www.inkstop.net) to read the instructions regarding customer service returns procedures. Click on the Satisfaction Guaranteed icon on the website.**

For technical support in regards to operation and installation of this item please call the toll free number below to obtain assistance. A customer service representative will assist you and provide operating information on the product.

Please have the following information available when you contact technical support:

- ☐ Your Name and Address
- ☐ Date of Purchase
- ☐ Model Number
- ☐ Serial Number
- ☐ Store Name and Address
- ☐ Type of problem with the unit

To contact the technical support facility, please call **508-435-4830** or 800-639-3803.

Email Support: [techsupport@fourstari.com](mailto:techsupport@fourstari.com)

## **Warranty**

### **90 Days Limited Warranty**

This product is warranted to be free from defects in material and workmanship for a period of 90 days. Warranty obligations are limited to replacement or repair of defective parts and components, at the option of the manufacturer. If the original model is no longer available, we will substitute with a model of equal or better value than the original item. The warranty of this product is null and void if the product is subjected to negligence, abuse, modification, misuse, accident or if the customer uses the product for a function it was not intended for. This warranty is only valid for the original purchaser of this product and will not be honored if the product is resold. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

The manufacturer will not be liable for incidental or consequential damages caused by the use of this product. The manufacturer will not be liable for any costs such as lost profits or revenues, cost of temporary replacements, loss of data, loss of equipment or use of equipment or any claims by third parties.

After 14 days from the purchase date of this product, please call the phone number listed below to obtain service. A customer service representative will give you a return authorization (RA number) allowing you to ship the product to the service center. The purchaser must have a copy of the original receipt for proof of purchase within 90 days. The purchaser of this product is responsible for any shipping charges to the repair facility. The manufacturer service center will repair or replace the unit in question and send it back to the purchaser.

In order to contact the service facility, please call **508-435-4830** or 800-639-3803.

The address for this facility is:

Fourstar Group  
26840 Fargo Ave.  
Suite C  
Bedford Heights, OH 44146

E-mail Support: [techsupport@fourstari.com](mailto:techsupport@fourstari.com)

